

# PERFORATED+ TRIM LIFTING TAPE


## TECHNICAL DATA SHEET 1058

V1 (12/24)

### PRODUCT DESCRIPTION

Perforated Plus Trim Lifting Tape offers excellent resistance to heat, good adhesion to a variety of surfaces and residue-free removal. The product comprises a high performance translucent purple PVC tape with a rubber-based pressure sensitive adhesive; a thick PE Film to provide good leverage of rubbers and gaskets from windows and body-side mouldings; and a liner to allow the tape to be easily unwound. The product is perforated making it easy to tear and is flexible to allow contours and curves to be followed.

### PRODUCT CONSTRUCTION

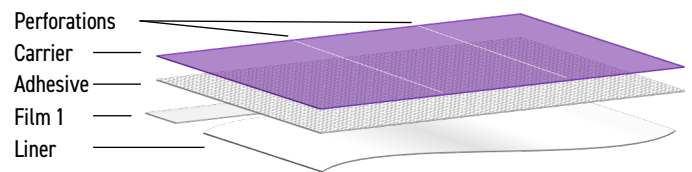

### SHELF LIFE

12 months from date of receipt by customer when stored at 20°C ±5°C (68°F ±7°F) and 65% relative humidity.

### PHYSICAL PROPERTIES

Values shown are typical values and should not be used for specification purposes.

Carrier	PVC
Adhesive	Rubber-based
Film 1	Polyester
Main Colour	Translucent Purple
Liner	Release-coated paper
Total Thickness	315µm / 0.315mm (±10%)
Width	50mm (±10%)
Length	10m (±2%)

### PERFORMANCE PROPERTIES

Values shown are typical values and should not be used for specification purposes.

Peel Adhesion	8N/25mm	[ASTM D-1000]
Elongation at Break	>200% (excludes perforations)	
Tensile Strength	>200N (excludes perforations)	[ASTM D-1000]
Temperature Resistance	150°C (300°F) for ≤1 hr	

Tel: +44 (0)1625 618185 | [www.jtape.com](http://www.jtape.com) | [info@jtape.com](mailto:info@jtape.com)

Designed & Manufactured in the UK: Hulley Road, Macclesfield, Cheshire, SK10 2SF.

#TAPESMART

Important Notice to Purchaser: JTAPE MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. The user is responsible for determining whether the JTAPE product is fit for a particular purpose and suitable for the user's application. Please remember that many factors can affect the use and performance of a JTAPE Automotive product in a particular application. The materials to be bonded to the product, the conditions in which the product is used, and the time and environmental conditions, in which the product is expected to perform are among the many factors that can affect the use and performance of a JTAPE Automotive product, some of which are uniquely within the user's knowledge and control. It is essential that the user evaluate the JTAPE Automotive product to determine whether it is fit for a particular purpose and suitable for user's methods of application. Limitation of Remedies and Liability: If the JTAPE product is proved to be defective, THE EXCLUSIVE REMEDY, AT JTAPE'S OPTION, SHALL BE TO REFUND THE PURCHASE PRICE OF OR TO REPAIR OR REPLACE THE DEFECTIVE JTAPE PRODUCT. JTAPE shall not otherwise be liable for loss or damages, whether direct, indirect, special, incidental, or consequential, regardless of the legal theory asserted, including negligence, warranty, or strict liability.